


SSSBN-Series Stainless Steel Screen Breather Vent

SSSBN-Series breather vent combines low profile and high air flow into a reality, suitable for many applications, particularly where space is limited. Special screen filter is formed by stainless steel wire, offers very high mechanical resistance, guaranteeing long life even under high pressure. 316 grade stainless steel fitting offers complete corrosion resistance.



Supplied with standard male pipe threads, they can be installed with little protrusion as a flat integral part of the equipment. Unit should be mounted in a protective position free from excessive vibration. Use wrench on hex head to tighten unit to the device. Stainless steel wire screen can be easily cleaned by reversing the flow of the filtered matter.

SYMBOL



HOW TO ORDER

SSSBN – □ □ – **316**
Stainless Steel **Connection (NPTM)**
Screen Breather Vent **18 = 1/8", 28 = 1/4"**
 38 = 3/8", 48 = 1/2"
 68 = 3/4", 88 = 1"









California Proposition 65 Warning

WARNING: This product can expose you to chemicals, including lead, which is known to the state of California to cause Cancer, Birth Defects or other reproductive harm. For more information go to www.p65warnings.ca.gov

SPECIFICATIONS

ITEM	MODEL	SSSBN-18-316	SSSBN-28-316	SSSBN-38-316	SSSBN-48-316	SSSBN-68-316	SSSBN-88-316
CONNECTION	NPTM	1/8"-27	1/4"-18	3/8"-18	1/2"-14	3/4"-14	1"-11.5
OVERALL LENGTH	IN.	43/64"	53/64"	1"	1-11/64"	1-31/64"	1-11/16"
HEX	IN.	1/2"	5/8"	3/4"	61/64"	1-3/16"	1-1/2"
NOISE LEVEL @60 PSI	dB	70	69	85	85	86	88
NOISE LEVEL @115 PSI	dB	74	72	88	90	90	92
MATERIAL	BODY	SUS316 STAINLESS STEEL					
	ELEMENT	STAINLESS STEEL WIRE SCREEN (10~150 micron)					
MAX OPERATING PRESSURE		300 PSI (21.1 kg/cm ²)					
OPERATING TEMPERATURE		35°~392°F (1.6°~200°C)					
WEIGHT (APPROX.)	OZ.	0.30	0.56	0.90	1.45	2.70	4.43
UNIT PACK	EA.	5	5	2	2	1	1

FLOW CHARACTERISTICS

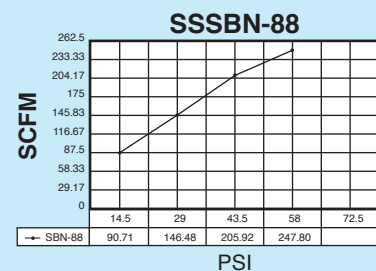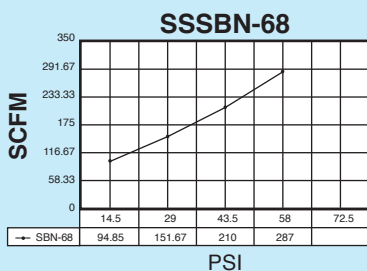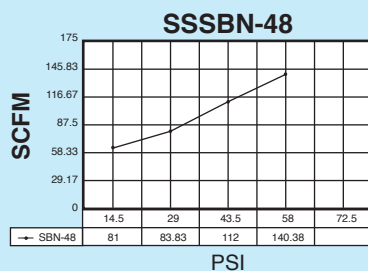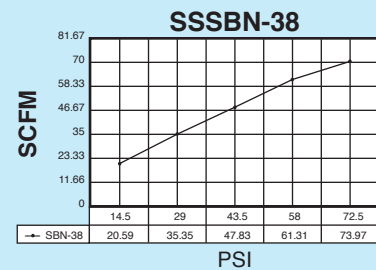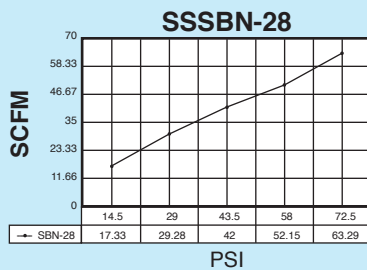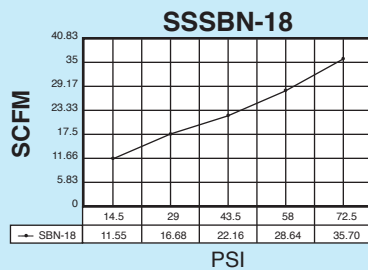

©2019 Adsens Tech. All Rights Reserved.